



Instructions for Fitting/Removal of S30NL Nexus Liner into S16*F Nexus Core Helmet (Vented Helmets Only)

Fitting:

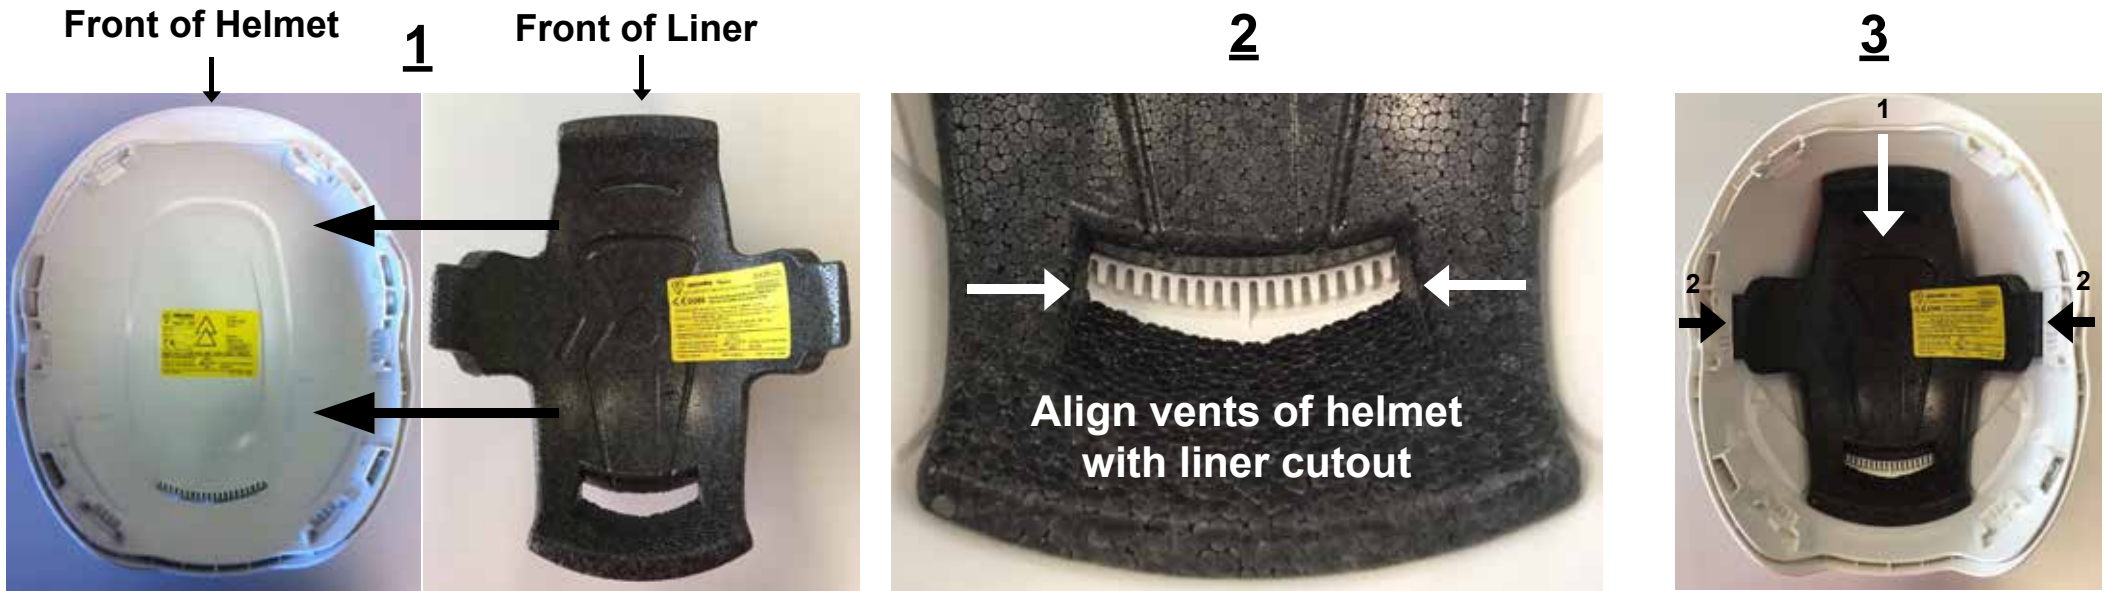


1. Press liner into helmet.
2. Secure by locating liner edge under helmet ledge

Removal:

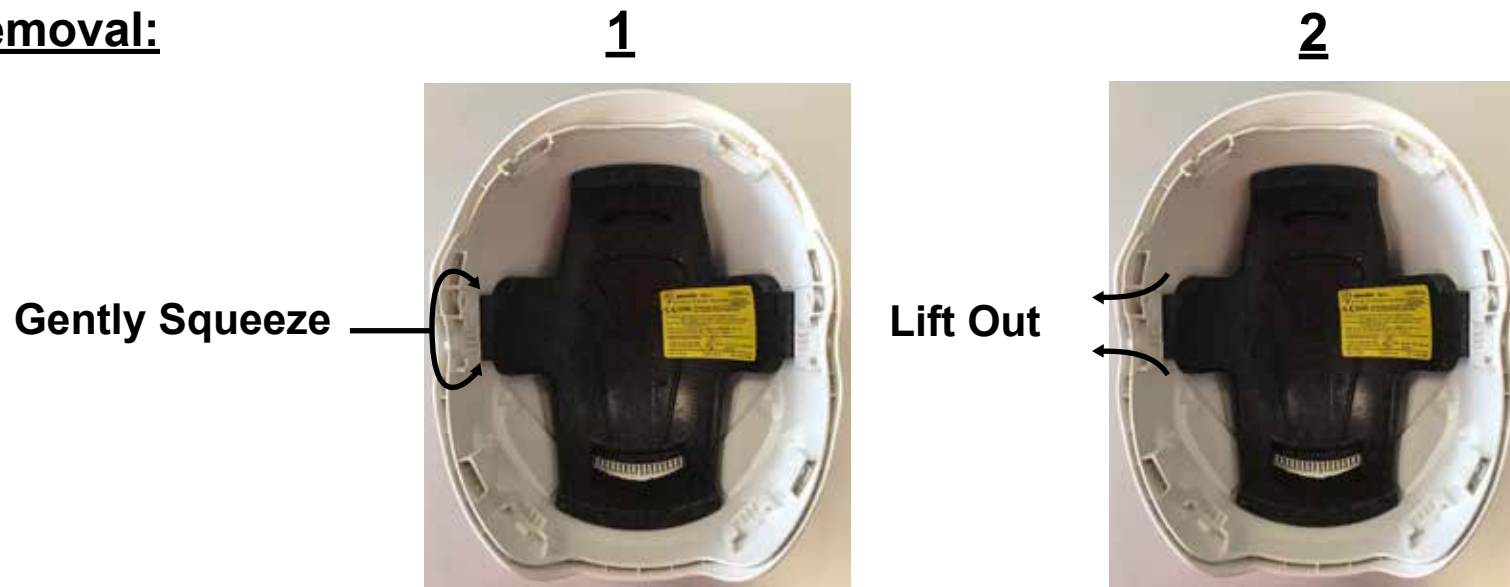

Instructions for Fitting/Removal of S30NY Nexus 4 Point Harness fitted onto S16*F Nexus Core Helmet (Vented Helmets Only) with S30NL Nexus Liner

Fitting:

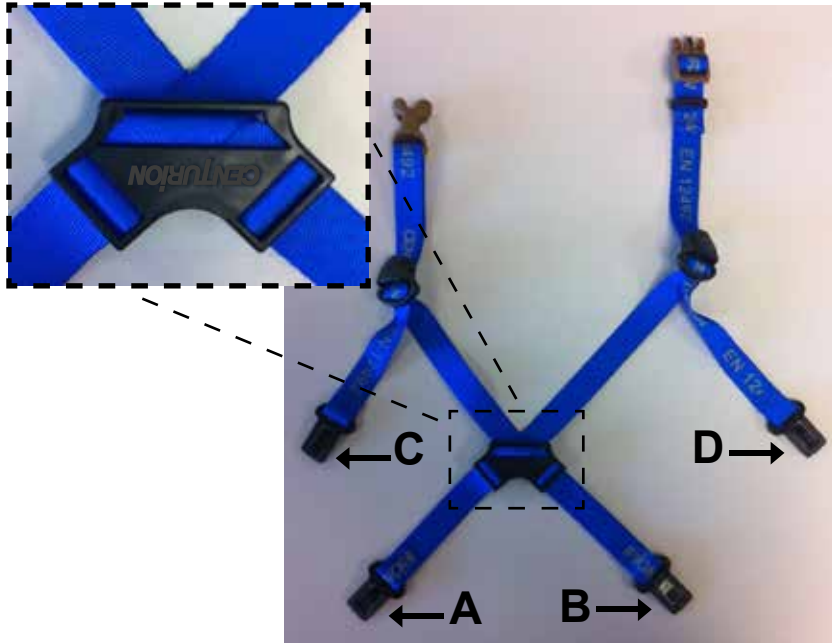

IMPORTANT



IMPORTANT:

With the clips facing inwards, ensure all four harness clips are pushed down fully into the Helmet Pockets.

Ensure clips **CLICKS** twice. Check by pulling the clips up - **the clips should not move**.


Repeat process if necessary.

Front of Helmet



Removal:

Two stage release

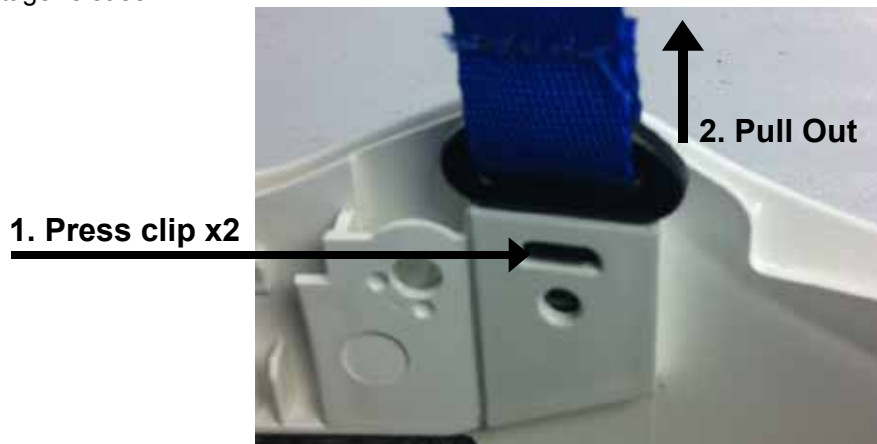

Centurion Safety Products Ltd
Howlett Way, Fison Way Ind Est, Thetford, Norfolk IP24 1HZ, UK
Tel: +44 (0)1842 754266 Fax: +44 (0)1842 765590
www.centurionsafety.eu

All Centurion products are CE approved
EC type examination by British Standards Institution, PO Box 6221, Kitemark Court,
Davy Avenue, Milton Keynes, MK5 8PP, UK
(notified body No. 0086)

017-004-076 Rev C